



 Lexmark™ |  GO Line™

## Lexmark MC3426i

Productivity. Reliability. Security.



We back this product with a guarantee that covers repair actions including the cost of spare parts in the first three years. The guarantee also offers you free 24-hour self-help online support and access to technical support by phone during working hours. Offer applies if the product is registered within 90 days from the date of purchase. Supplies and/or consumable parts, such as fuser or transfer unit, are excluded. Please refer to the detailed terms and conditions available at [lexmark.com/myguarantee](http://lexmark.com/myguarantee).

# Lexmark MC3426i

Small workgroup colour versatility is easy to deploy and share with the compact, lightweight Lexmark MC3426i multifunction. It combines printing at up to 24 ppm\* with automatic scanning at up to 90 images per minute plus copying and available cloud faxing\*\*. Take control with a 7.2 cm touch screen and connect via Wi-Fi and more.

## Compact colour versatility

- ▶ Get rich, vibrant colour output or copies at up to 24 pages per minute\*, plus automatic two-sided scanning at up to 90 images per minute.
- ▶ Tackle your workload with the power of a 1-GHz dual-core processor and 1 GB of memory.
- ▶ Compact dimensions of 344.4 mm high x 411.2 mm wide x 394.1 mm deep help it fit almost anywhere.
- ▶ Available cloud fax\*\* provides additional document sending and receiving options.



## Connect and command

- ▶ Connect via Wi-Fi, Gigabit Ethernet, or USB.
- ▶ Simplify mobile printing with the Lexmark Mobile Print app, Mopria®, and AirPrint.
- ▶ Take command of device settings and monitor vital system functions on a 7.2 cm colour touch screen.
- ▶ Built-in cloud connectors let you securely save scans to

and retrieve files from popular cloud services Box, DropBox, Google Drive, and Microsoft OneDrive.

## Sustained output, enduring quality

- ▶ Genuine Unison™ replacement toner offers rich, vibrant colour in available Extra High Yield cartridges that provide up to 4,500 pages of output\*\*\* for more printing and less downtime.
- ▶ Single-piece cartridge simplifies supply replacement for fewer interruptions.
- ▶ Optional input trays increase total input capacity to 751 sheets to support longer print runs and enhanced media flexibility.
- ▶ A steel frame and lifetime imaging components mean long life and minimal maintenance.

## Robust, built-in security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device, over the network, and everywhere in between.

## Save paper, save energy


- ▶ Automatic two-sided printing is standard.
- ▶ Built-in energy-saving modes help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The Lexmark Cartridge Collection Programme (LCCP) and Lexmark Equipment Collection Programme (LECP) minimise waste and support recycling (availability varies by country).

\* Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Subject to subscription with etherFAX®. A trial package (up to 3 months or 300 pages, whichever comes first) is included free of subscription charge; other fees, such as telecommunication charges, may apply. Contact etherFAX ([www.etherfax.net](http://www.etherfax.net)) for details. Trial may be withdrawn without notice. Service may not be available in all locations. Analogue faxing via phone line is not supported by this device.

\*\*\* Average continuous black or continuous composite colour (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See [www.lexmark.com/yields](http://www.lexmark.com/yields) for more information.

# Lexmark MC3426i

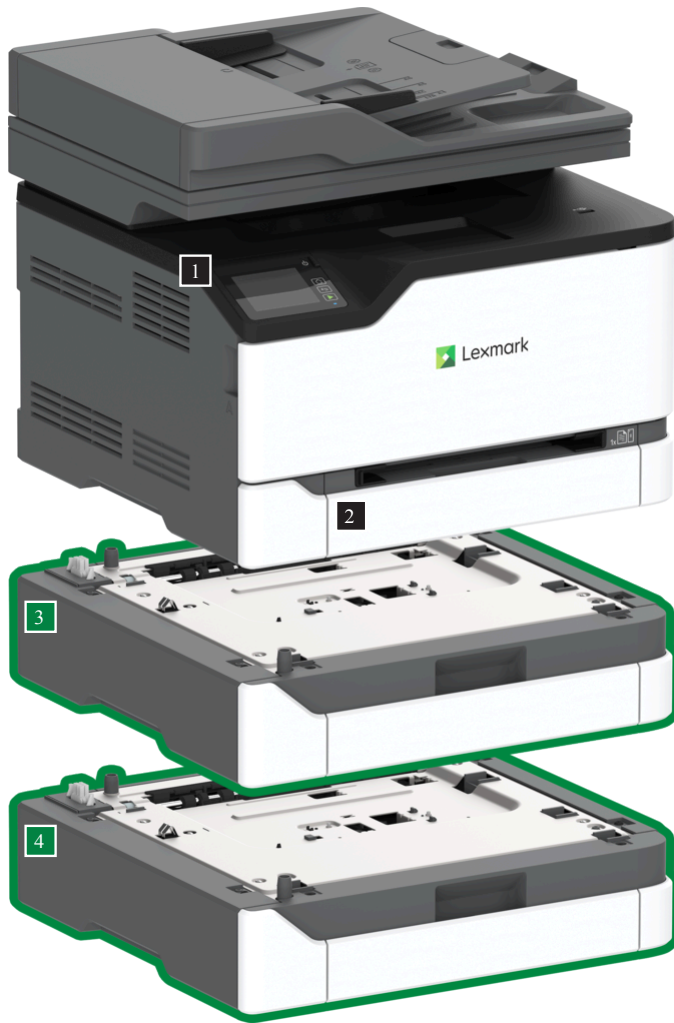

1 Multifunction product with  
7.2 cm touch screen  
344.4 x 411.2 x 394.1 mm

2 250-Sheet tray  
Dimensions included as part of  
base model

3 250-Sheet Tray  
103.9 x 411.2 x 381.0 mm

4 250-Sheet Tray  
103.9 x 411.2 x 381.0 mm

Standard  
Optional

Supports up to two optional 250-sheet trays.

All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

## Product Specifications

## Lexmark MC3426i

Printing	
Display	2.8 inch (7.2 cm) Colour touch screen
Print Speed	Up to: Black: 24 ppm <sup>1</sup> (A4) / Colour: 24 ppm <sup>1</sup> (A4)
Time to First Page	as fast as: Black: 10.8 seconds / Colour: 11 seconds
Print Resolution	Black: 4800 Colour Quality / Colour: 4800 Colour Quality
Memory	Standard: 1 GB / Maximum: 1 GB / standard: 1024 MB / maximum: 1024 MB
Hard Disk	Not Available
Recommended Monthly Page Volume	750 - 5,000 Pages <sup>2</sup>
Maximum Monthly Duty Cycle	Up to: 75,000 pages per month <sup>3</sup>
Copying	
Copy Speed	Up to: Black: 24.7 cpm <sup>1</sup> (A4) / Colour: 24.7 cpm <sup>1</sup> (A4)
Time to First Copy	as fast as: black: 13.1 seconds / colour: 13.1 seconds
Scanning	
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / Automatic single-pass 2-sided document feeder
A4/Ltr Duplex Scan Speed	Up to: Mono: 90 / 96 sides per minute / Colour: 40 / 42 sides per minute
A4/Ltr Simplex Scan Speed	Up to: Mono: 45 / 48 sides per minute / Colour: 20 / 21 sides per minute
ADF Paper Input Capacity	Up to: 50 pages 75 gsm bond
Supplies <sup>4</sup>	
Laser Cartridge Yields	up to: 4,500 <sup>5</sup> -page Black and Colour (CMYK) Extra High Yield Cartridges / up to: 1,500 <sup>5</sup> -page Black and Colour (CMYK) Cartridges
Cartridge(s) Shipping with Product	1,500 <sup>5</sup> -page Black Return Programme Toner Cartridge <sup>5</sup> , 1,500 <sup>5</sup> -page Colour (CMY) Return Programme Toner Cartridges <sup>5</sup>
Paper Handling	
Included Paper Handling	100-Sheet Output Bin, Single-Sheet Manual Feed, Automatic 2-sided printing, 250-Sheet Input
Paper Input Capacity	Up to: Standard: 250+1 pages 75 gsm bond / Maximum: 750+1 pages 75 gsm bond
Paper Output Capacity	Up to: Standard: 100 pages 75 gsm bond / Maximum: 100 pages 75 gsm bond
Media Types Supported	Hagaki Card, Paper Labels, Card Stock, Plain Paper, Glossy paper, Refer to the Paper & Speciality Media Guide
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope
General Information <sup>6</sup>	
Standard Ports	Front Hi-Speed USB port Compatible with USB 2.0 Specification (Type A), 802.11b/g/n Wireless, USB 2.0 Specification Hi-Speed Certified (Type B), Ethernet 10/100/1000 BaseTX (RJ-45)
Noise Level	Operating: 51/52 dBA (Print) / 50 dBA (Copy) / 44 dBA (Scan)
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 3,048 Metres (10,000 Feet) / Temperature: 10 to 32°C (50 to 90°F)
Product Guarantee	3-year guarantee (upon registration)
Size / Weight	H x W x D: 344.4 x 411.2 x 394.1 mm / 19.4 kg
ENERGY STAR Typical Electricity Consumption	TEC: 0.37 kilowatt-hours per week

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPS. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average continuous cartridge yield is stated number of standard pages as listed. Declared yield value in accordance with ISO/IEC 19798. <sup>6</sup> Printers are sold subject to certain licence/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details.

© 2021 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorised use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



[lexmark.co.uk](http://lexmark.co.uk)