



 Lexmark™

Lexmark CS730de

Color and performance



 Unison™
TONER

Works with
 Apple AirPrint

 mopria

 IPP
Everywhere™

 ENERGY STAR

 epeat
SILVER

Lexmark CS730de

Designed for security, ease of use, and sustainability, the Lexmark CS730de delivers professional color for mid-to-large workgroups at speeds up to 42/40 (letter/A4) pages per minute*. The 4.3-inch (10.9 cm) tablet-like touchscreen makes completing your printing tasks intuitively easy. Replacement cartridges with Unison™ Toner yield up to 22,000/10,500 black/color pages** to keep you going.

Robust, enduring quality

- ▶ Enjoy high-quality color output in a wide variety of environments—from back-office to retail to harsh manufacturing conditions.
- ▶ Intentionally engineered to last seven years or more with durable steel frames and long-life components.
- ▶ Unison™ Toner replacement cartridges yield up to 22,000/10,500 black/color pages**.



Always easy. Always intuitive.

- ▶ Powerful features are easy to use.
- ▶ Large, tablet-like, button-free touchscreens help you intuitively complete every task, from the basic to the complex.
- ▶ Add Lexmark or third-party apps to meet your specific business needs.

Make a statement with professional color

- ▶ Enjoy the benefits of vibrant, professional-quality output

allowing you to do more color printing in-house—saves time and money.

- ▶ Match corporate colors on marketing collateral and brand-sensitive text and graphics with PANTONE® calibration and Lexmark Named Color Replacement.

Secure by design

- ▶ Lexmark security features help keep your information safe—in the document, on the device, over the network and at all points in between.
- ▶ Always improving security, we now include a standard Trusted Platform Module***, which delivers authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint.

Sustainability matters

- ▶ Designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The award-winning Lexmark Cartridge Collection Program (LCCP) and Lexmark Equipment Collection Program (LECP) minimize waste and support recycling (availability varies by country).

Power up with IoT

- ▶ Our sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimize performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous black or continuous composite color (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information. Yield stated on cartridge labels, packaging, and printer device menu pages may be substantially lower than final ISO tested yield. For Lexmark's official statement of yield, see ISO yield reports at https://www.lexmark.com/en_us/products/supplies-and-accessories/iso-page-yields/color-laser-reports.html. Update firmware on your device to ensure accuracy of displayed yield. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Program (LCCP).

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark CS730de

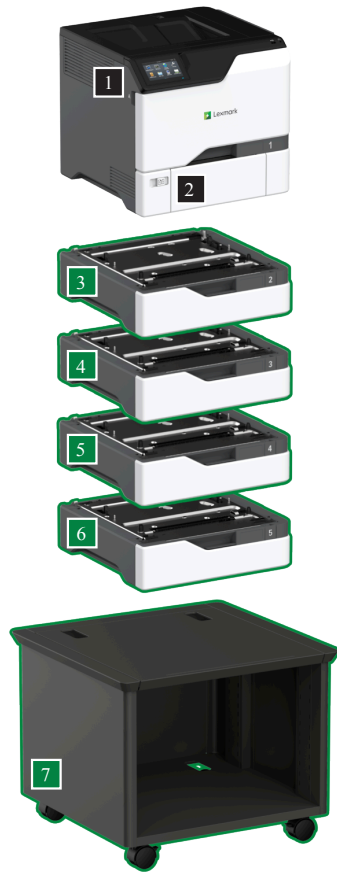

- 1 **Printer with 4.3-inch (10.9 cm) touch screen**
413 x 479 x 489 mm
16.25 x 18.85 x 19.25 in.
- 2 **550-Sheet tray with 100-sheet multipurpose feeder**
Dimensions included as part of base model
- 3 **550-Sheet Tray**
119 x 463 x 483 mm
4.7 x 18.23 x 19 in.
- 4 **550-Sheet Tray**
119 x 463 x 483 mm
4.7 x 18.23 x 19 in.

- 5 **550-Sheet Tray**
119 x 463 x 483 mm
4.7 x 18.23 x 19 in.
- 6 **550-Sheet Tray**
119 x 463 x 483 mm
4.7 x 18.23 x 19 in.
- 7 **Adjustable Stand**
521 x 653 x 625 mm
20.5 x 25.7 x 24.6 in.

- Standard
- Optional

| | |
|------------|---|
| P/N | Hardware |
| 47C9000 | Lexmark CS730de |
| P/N | Supplies |
| 71C0H10 | Lexmark CS730, 735, CX730 Black 22K Toner Cartridge |
| 71C0H20 | Lexmark CS/CX730 Cyan 10.5K Toner Cartridge |
| 71C0H30 | Lexmark CS/CX730 Magenta 10.5K Toner Cartridge |
| 71C0H40 | Lexmark CS/CX730 Yellow 10.5K Toner Cartridge |
| 71C0W00 | Lexmark CS/CX730, 735, C/XC4342, C4352 170K Waste Container |
| 71C0Z10 | Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Black 150K Imaging Unit |
| 71C0Z50 | Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Color (CMY) 150K Imaging Unit |
| 71C80C0 | Lexmark CS/CX730, 735 Cyan Return Program 5K Toner Cartridge |
| 71C80K0 | Lexmark CS/CX730, 735 Black Return Program 5K Toner Cartridge |
| 71C80M0 | Lexmark CS/CX730, 735 Magenta Return Program 5K Toner Cartridge |
| 71C80Y0 | Lexmark CS/CX730, 735 Yellow Return Program 5K Toner Cartridge |
| 71C8HC0 | Lexmark CS/CX730 Cyan Return Program 10.5K Toner Cartridge |
| 71C8HK0 | Lexmark CS730, 735, CX730 Black Return Program 22K Toner Cartridge |
| 71C8HM0 | Lexmark CS/CX730 Magenta Return Program 10.5K Toner Cartridge |
| 71C8HY0 | Lexmark CS/CX730 Yellow Return Program 10.5K Toner Cartridge |
| P/N | Paper Handling |
| 40C2100 | 550-Sheet Tray |
| P/N | Memory Options |
| 27X0400 | 500+ GB Hard Disk |
| 57X0070 | Removable Hard Disk Enclosure Kit |
| 57X9528 | Intelligent Storage Device (ISD) |
| P/N | Application Solutions |
| 57X0300 | Contact Authentication Device |
| 57X0301 | Contactless Authentication Device |
| 82S1203 | IPDS License |
| 82S1204 | Bar Code License |
| P/N | Connectivity |
| 1021294 | USB (2 Meter) Cable |
| 27X0823 | MarkNet N8370 Wireless for CS720, CS725, CX725 |
| 27X6410 | Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server |
| SPD0002 | Surge Protective Device, 220-240V |
| P/N | Furniture |
| 40C2300 | Adjustable Stand |

Supports up to four optional 550-sheet trays.

All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

IPDS License and Bar Code License require an Intelligent Storage Drive.

| Product Specifications | | Lexmark CS730de |
|---|--|-----------------|
| Printing | | |
| Display | Lexmark e-Task 4.3-inch (10.9 cm) color touch screen | |
| Print Speed | Up to: Black: 42 ppm ¹ (Letter) / Color: 42 ppm ¹ (Letter) | |
| Time to First Page | As fast as: Black: 6.4 seconds / Color: 7.0 seconds | |
| Print Resolution | Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Color: 4800 CQ (2400 x 600 dpi), 1200 x 1200 dpi | |
| Memory | Standard: 1024 MB / Maximum: 1024 MB | |
| Hard Disk | Intelligent Storage Drive (optional); Magnetic Hard Disk (optional) | |
| Recommended Monthly Page Volume | 1500 - 15000 pages ² | |
| Maximum Monthly Duty Cycle | Up to: 120000 pages per month ³ | |
| Supplies⁴ | | |
| Laser Cartridge Yields | up to: 10,500 ⁵ -page Color (CMY) High Yield Cartridges / up to: 22,000 ⁵ -page Black High Yield Cartridge | |
| Imaging Unit Estimated Yield | Up to: 150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage ⁶ | |
| Cartridge(s) Shipping with Product | 5,000 ⁵ -page Black and Color (CMYK) Return Program Toner Cartridges ⁵ | |
| Paper Handling | | |
| Included Paper Handling | 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin, 550-Sheet Input | |
| Optional Paper Handling | 550-Sheet Tray | |
| Paper Input Capacity | Up to: Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 2850 pages 20 lb or 75 gsm bond | |
| Paper Output Capacity | Up to: Standard: 300 pages 20 lb or 75 gsm bond / Maximum: 300 pages 20 lb or 75 gsm bond | |
| Media Types Supported | Vinyl Labels, Banner Paper, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide | |
| Media Sizes Supported | A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope | |
| General Information⁷ | | |
| Standard Ports | Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot | |
| Optional Network Ports | Internal MarkNet N8370 802.11b/g/n/a Wireless, NFC | |
| Noise Level | Operating: 52 dBA (Print) | |
| Specified Operating Environment | Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity | |
| Product Warranty | 1-Year Onsite Repair, Next Business Day | |
| Size / Weight | H x W x D: 413 x 479 x 489 mm / 32 kg | |
| ENERGY STAR Typical Electricity Consumption | TEC: 0.53 kilowatt-hours per week | |

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ⁶ Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁷ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

