



Lexmark MX953se

Versatile. Simple. Sustainable.



Lexmark MX953se

With the new MX953se monochrome A3 multifunction printer, you get reassuring versatility, exceptional sustainability, and surprising simplicity from such sophisticated technology. Boost your productivity with high-quality prints — up to 55 pages per minute*. Intuitively navigate the 10-inch (25 cm) color touchscreen, and save time with single-pass two-sided scanning. Effortlessly create everything your business requires, and custom configure your multifunction printer with interchangeable options tailored to your needs.

Versatile: Easy to Use

Create everything your business requires and anything you can imagine — from standard office documents to marketing brochures, booklets and posters — with broad media size support, high-volume printing, and exceptional paper handling and finishing capabilities.

Print crisp visualizations, charts and documents with deep blacks and smooth grays and a full range of media sizes so your customers can effectively communicate to co-workers, customers, and partners.

Easily incorporate your multifunction printer into your workspace with a versatile, configurable design that saves space without sacrificing performance.

Boost your productivity with our rich suite of cutting-edge software and solutions with broad capabilities including scanning paper files directly into your cloud-based storage systems and automatically translating documents into 100+ languages.

Further your organization's digital transformation with direct integration into your critical workflows and core business systems using these IoT-enabled devices.



Simple: Easy to Manage

Quickly do what you need to do using an intuitive operator panel and easy-to-follow navigation.

Easily maintain your devices with one-handed toner replacement, easy-to-reach serviceable areas, and alerts that are simple to understand.

Enjoy the peace of mind of knowing you are protected by the industry's most comprehensive security portfolio, right out of the box.

Keep your business running with exceptional reliability, industry-leading durability, and long-lasting toner and supplies.

Rest easy that every aspect of your device is made to work together seamlessly thanks to Lexmark's core technology ownership.

Sustainable: Easy to feel good about

Feel good about your purchase and help meet your own sustainability goals with our world-class practices and independent third-party certifications.

Do your part for the planet with our industry-leading use of post-consumer recycled materials and our award-winning cartridge recycling program.

Save energy — and money — with technology that exceeds strict global standards for energy efficiency.


Minimize your impact on the environment with a company that focuses on sustainability throughout the product lifecycle from design through use, end of life and beyond.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Fax icon shown on the operator panel when Fax Server is enabled, Fax Over IP is configured, etherFAX is configured, or an optional Analog Modem is installed.

Lexmark MX953se

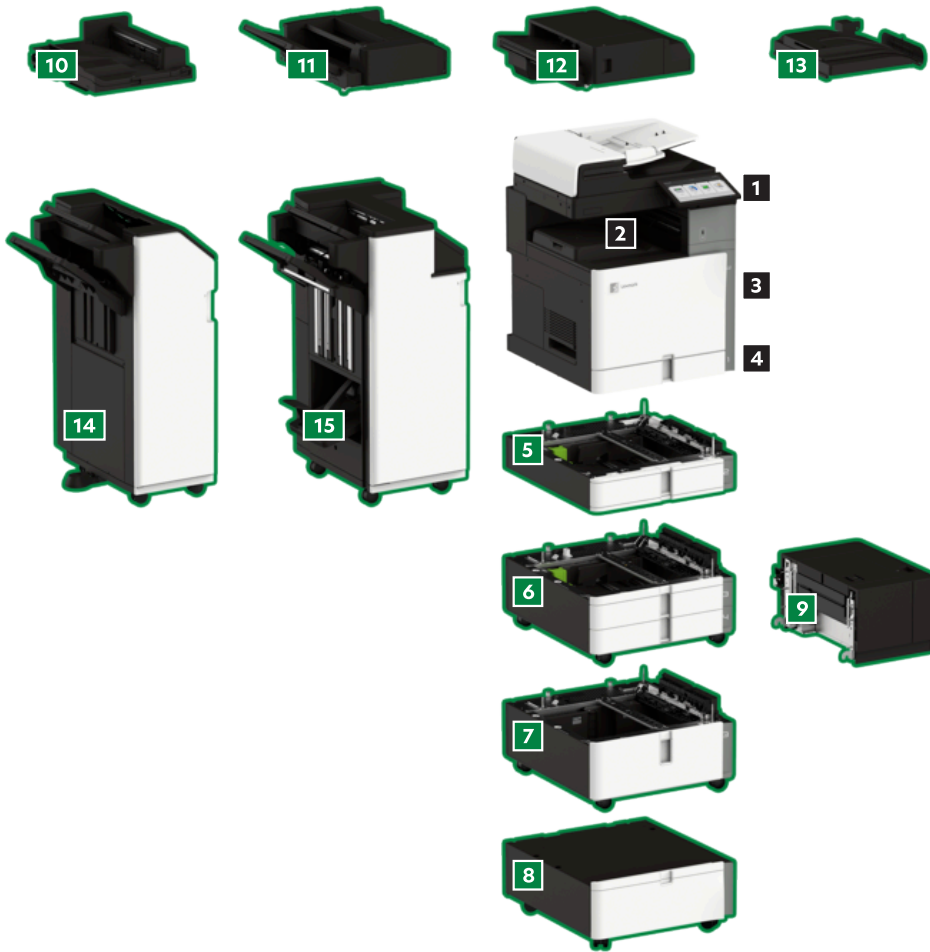

- 1 **Multifunction product with 10-inch (25 cm) touch screen**
809 x 592 x 660 mm
31.9 x 23.3 x 26.0 in.
- 2 **500-Sheet output bin**
Dimensions included as part of base model
- 3 **150-Sheet multipurpose feeder**
Dimensions included as part of base model
- 4 **550-Sheet tray**
Dimensions included as part of base model
- 5 **550-Sheet Tray**
163 x 587 x 649 mm
6.4 x 23.1 x 25.6 in.
- 6 **2 x 550-Sheet Tray**
314 x 587 x 649 mm
12.4 x 23.1 x 25.6 in.
- 7 **2000-Sheet Tandem Tray - Letter**
314 x 587 x 649 mm
12.4 x 23.1 x 25.6 in.
- 8 **Cabinet**
247 x 587 x 660 mm
9.7 x 23.1 x 26.0 in.
- 9 **1500-Sheet High-Capacity Tray**
290 x 342 x 545 mm
11.4 x 13.5 x 21.4 in.

- 10 **Paper Transport**
143 x 412 x 466 mm
5.6 x 16.2 x 18.3 in.
- 11 **Folding Paper Transport**
184 x 612 x 555 mm
7.2 x 24.1 x 21.9 in.
- 12 **500-Sheet Staple Finisher**
150 x 546 x 523 mm
5.9 x 21.5 x 20.6 in.
- 13 **Offset Stacker**
107 x 420 x 489 mm
4.2 x 16.5 x 19.3 in.
- 14 **1250-Sheet Staple 2/3 Hole Punch Finisher**
995 x 575 x 610 mm
39.2 x 22.6 x 24.0 in.
- 15 **2250-Sheet Booklet Staple 2/3 Hole Punch Finisher**
995 x 650 x 613 mm
39.2 x 25.6 x 24.1 in.



P/N
20L8350

Hardware
Lexmark MX953se

P/N
20L7500
25A0013
77L1HK0

Supplies
Staple Cartridges (4 pack)
Staple Cartridges (3 pack)
Lexmark MX953, CS963, CX961, 962, 963 Black Return Program 47.7K Toner Cartridge
79L0W00 Lexmark MX953 250K Waste Container

P/N
20L8800
20L8801
20L8802
20L8803
20L8804
20L8810
20L8811
20L8812

20L8813
20L8814
20L8815

20L8816
20L8817

Paper Handling
550-Sheet Tray
2 x 550-Sheet Tray
2000-Sheet Tandem Tray - A4
2000-Sheet Tandem Tray - Letter
1500-Sheet High-Capacity Tray
500-Sheet Staple Finisher
Folding Paper Transport
1250-Sheet Staple 2/3 Hole Punch Finisher
1250-Sheet Staple 2/4 Hole Punch Finisher
2250-Sheet Booklet Staple 2/3 Hole Punch Finisher
2250-Sheet Booklet Staple 2/4 Hole Punch Finisher
Offset Stacker
Paper Transport

P/N
27X0420
57X0070

Memory Options
500GB Hard Disk Drive (SATA)
Removable Hard Disk Enclosure Kit

P/N
57X0225
57X0235

57X0300
57X0301

Application Solutions
Desktop Contactless Reader
Contactless Front Solutions Module (Primary)
Contact Authentication Device
Contactless Authentication Device
IPDS License
Bar Code License

P/N
1021231
1021294
14F0100
27X0142

37X6146
57X7040
SPD0002

Connectivity
Parallel (10') Cable
USB (2 Meter) Cable
RS-232C Serial Interface Card
Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
MarkNet N8210 v.34 Fax Card
English Keyboard Kit
Surge Protective Device, 220-240V

P/N
20L8806
20L8807

Furniture
Cabinet
Keyboard Shelf

You can install one 550-Sheet tray.
You can install one 2x550-Sheet tray, one 2,000-Sheet tandem tray or one Cabinet, but you must also install one 550-Sheet tray above it.
You can install one 1,500-Sheet high-capacity tray, but you must install one 2x550-Sheet tray or one 2,000-Sheet tandem tray beside it.
You can install one 500-Sheet staple finisher, one Offset stacker or one Folding paper transport unit.
You can install one 1,250-Sheet staple hole punch finisher or one 2,250-Sheet booklet staple hole punch finisher, but you must also install a Paper transport unit or Folding paper transport unit, one 550-Sheet tray, and one 2x550-Sheet tray or one 2,000-Sheet tandem tray or one Cabinet.

Product Specifications		Lexmark MX953se
Printing		
Display	Lexmark e-Task 10-inch (25 cm) class color touch screen	
Print Speed	Up to: Black: 55 ppm ¹ (Letter)	
Time to First Page	As fast as: Black: TBD seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ	
Memory	Standard: 4 GB / Maximum: 4 GB	
Hard Disk	Intelligent Storage Drive included; Magnetic Hard Disk available	
Recommended Monthly Page Volume	4,000 - 20,000 pages ²	
Maximum Monthly Duty Cycle	Up to: 150 000 pages per month ³	
Copying		
Copy Speed	Up to: Black: 55 cpm ¹ (Letter)	
Time to First Copy	As fast as: Black: TBD seconds	
Scanning		
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed	Up to: Black: 200/200 sides per minute / Color: 200/200 sides per minute	
A4/Ltr Simplex Scan Speed	Up to: Black: 100/100 sides per minute / Color: 100/100 sides per minute	
ADF Paper Input Capacity	Up to: 200 pages 20 lb or 75 gsm bond	
Supplies⁴		
Laser Cartridge Yields	up to: 47,700 ⁵ -page Black Cartridge	
Imaging Unit Estimated Yield	Up to: 225,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product	5,000 ⁵ -page Black Toner Cartridge ⁵	
Paper Handling		
Included Paper Handling	500-Sheet Output Bin, 550-Sheet Tray, 150-Sheet Multipurpose Feeder	
Optional Paper Handling	2,250-Sheet Booklet Staple Hole Punch Finisher, 500-Sheet Staple Offset Finisher, Folding Paper Transport Unit, 1,250-Sheet Staple Hole Punch Finisher, Offset Stacker, 1,500-Sheet High-Capacity Tray, Paper Transport Unit, 2000-Sheet Tandem Tray, Cabinet, 2 x 550-Sheet Tray, 550-Sheet Tray	
Paper Input Capacity	Up to: Standard: 700 pages 20 lb or 75 gsm bond / Maximum: 4750 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 500 pages 20 lb or 75 gsm bond / Maximum: 2650 pages 20 lb or 75 gsm bond	
Media Types Supported	Vinyl Labels, Labels, Card Stock, Plain Paper, Envelopes, Glossy paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 12 x 18", 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, SRA3, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope	
General Information		
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2.0 Specification Hi-Speed Certified (Type B)	
Optional Network Ports / Optional Local Ports	MarkNet N8230 Fiber Ethernet Print Server / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial	
Noise Level	Operating: TBD dBA (Print) / TBD dBA (Copy) / TBD dBA (Scan)	
Specified Operating Environment	Altitude: 0 - 2896 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity / Temperature: 10 to 32.2°C (50 to 90°F)	
Product Warranty	1-Year Onsite Repair, Next Business Day	
Size / Weight	H x W x D: 809 x 592 x 660 mm / TBD kg	
ENERGY STAR Typical Electricity Consumption	TEC: TBD kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2024 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

